



MULTISTONE™
TILES

High versatility
would back us



New Multi Tech+


DOUBLE CHARGE

+Multi Granules Design Tech

800x1200mm | 800x800mm



CARRARA SERIES

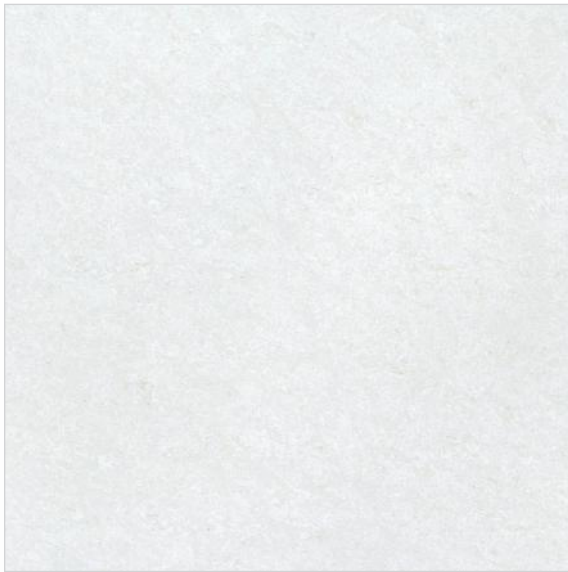


CARRARA WHITE



CARRARA BEIGE



CARRARA GOLD

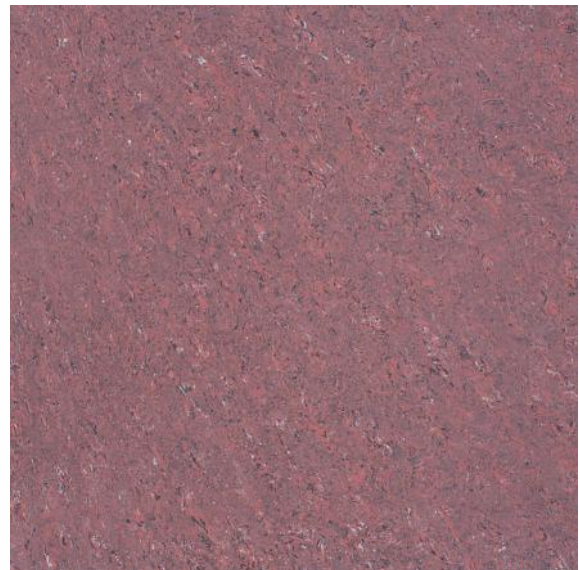


CARRARA LAVA



CARRARA GALAXY



CARRARA ALMOND

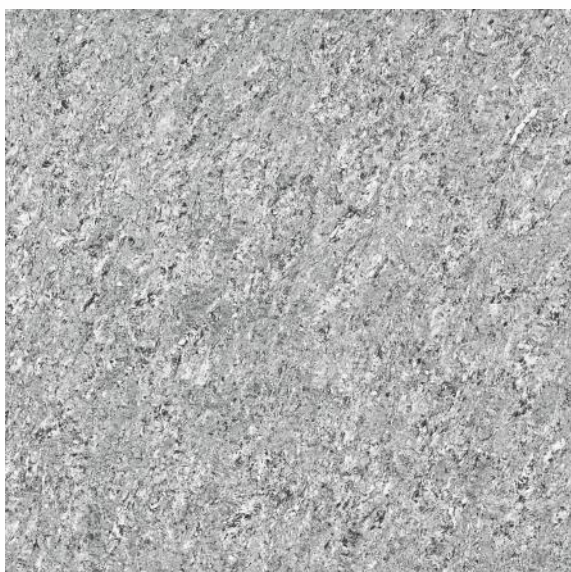

CARRARA OPERA



FUSION SERIES




FUSION WHITE



FUSION GOLD



FUSION VOLCENO

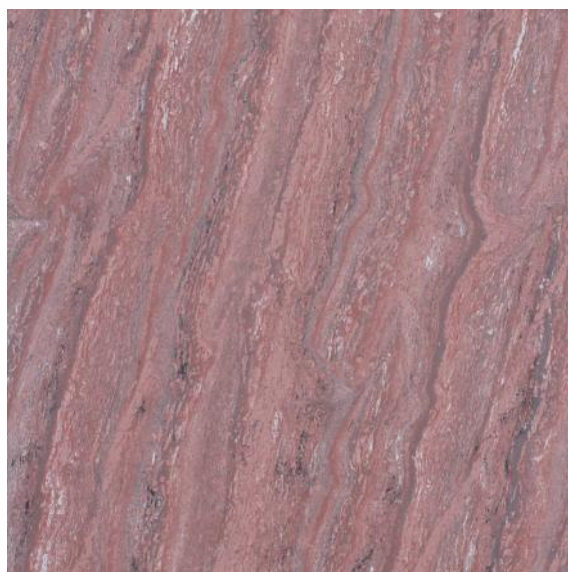

FUSION LAVA

EMERALD SERIES



EMERALD WHITE



EMERALD BLACK



EMERALD BEIGE




EMERALD MINT

PERLETO SERIES



PERLETO WHITE

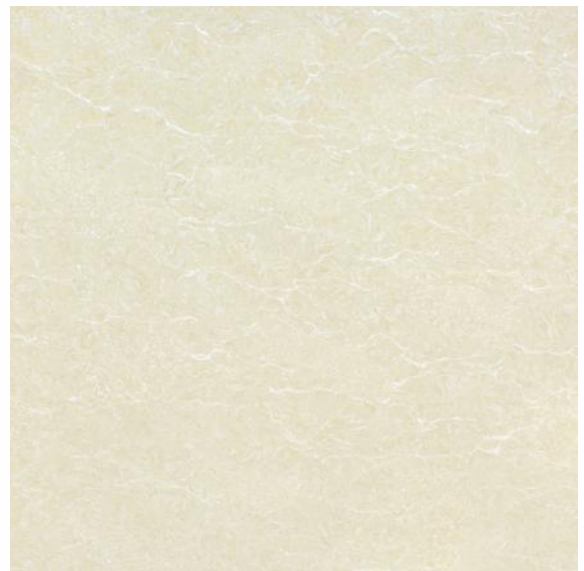


PERLETO BEIGE

TYPHOON SERIES



TYPHOON WHITE

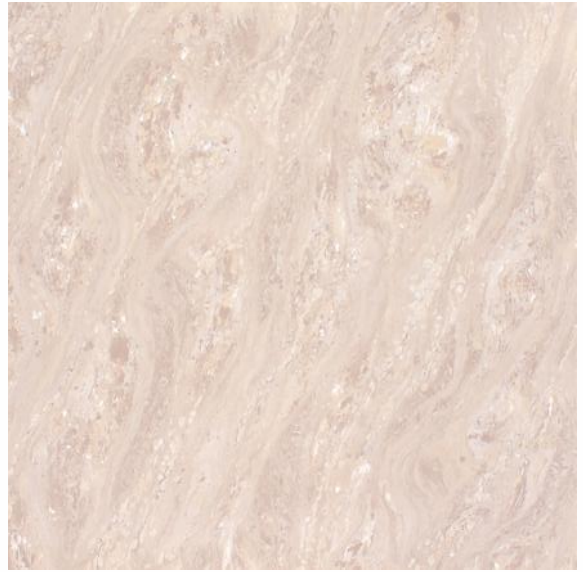

TYPHOON BROWN

JEMSTONE SERIES



JEMSTONE WHITE




JEMSTONE BEIGE





















JEMSTONE ROSSA

HIMALYA SERIES



HIMALYA WHITE

TECHNICAL SPECIFICATION

CHARACTERISTIC			
DIMENSION & SURFACE QUALITY	INTERNATIONAL SPECIFICATIONS ISO 13006/EN 176 GROUP & IS 15622 : 2006	MULTISTONE VALUE	METHOD OF TESTING
 Deviation In Length & Width	± 0.6%	± 0.1%	ISO 10545 Pt2
 Deviation In thickness	± 5%	± 3%	ISO 10545 Pt2
 Straightness Of sides	± 0.5%	± 0.1%	ISO 10545 Pt2
 Rectangularity	± 0.6%	± 0.2%	ISO 10545 Pt2
 Surface Flatness	± 0.5%	± 0.2%	ISO 10545 Pt2
 Glossiness	gloss meter	min 90% Reflection	ISO 10545 Pt2
PHYSICAL & THERMAL PROPERTIES			
 Water Absorption	< 0.5%	< 0.05%	ISO 10545 Pt3
 Mohs Hardness	> 6	8	EN 101
 Flexural Strength (Mor)	> 35N/m ²	> 46 N/mm ²	ISO 10545 Pt4
 Surface Abrasion Resistance	< 175 mm ³	< 145 mm ³	ISO 10545 Pt6
 Skid Resistance	> 0.4	> 0.4	ISO 10545 Pt17
 Breaking Strength	1113 N	2800 N	ISO 10545 Pt4
 Density (g/cc)	> 2	> 2.4	DIN 51082
 Frost Resistance	Frost Proof	Frost Proof	ISO 10545 Pt12
 Thermal Shock Resistance	No Damage	No Damage	ISO 10545 Pt9
 Thermal Expansion	< 9 x 10 ⁽⁻⁶⁾	< 6 X 10 ⁽⁻⁶⁾	ISO 10545 Pt8
 Moisture Expansion	Nil	Nil	ISO 10545 Pt10
CHEMICAL PROPERTIES			
 Chemical Resistance	No Damage	No Damage	ISO 10545 Pt13
 Colour Resistance	No Damage	No Damage	DIN 51094
 Stain Resistance	Resistant	Resistant	ISO 10545 Pt14

*Not applicable for glossy finishes

** These parameters are not applicable for structured punches

PACKING DETAILS

Size	No. of Tiles Per Box	Coverage Area in Sq. Mt. / Sq. Ft	Weight / Box
800x800mm	3 Pcs.	1.92 Sq. Mt. / 20.67 Sq.Ft	42 Kgs

Coming Soon

800x1200mm



Multistone Granito Pvt. Ltd.

Factory Address:

N.H. 8-A, Lunsar Road,
Nr. Bhojalpara, G.E.B. Sub Station,
Wankaner, Morbi-363621 (Guj.), INDIA.

Mo: +91 70692 90001 / 20 ☎ +91 79 4890 4932 ✉ info@multistone.in 🌐 www.multistone.in

Corporate Office:

214, 2nd Floor, Dev Arc Mall,
Opp. Iskon Temple, S.G. Highway,
Ahmedabad-380015 (Guj.), INDIA.

